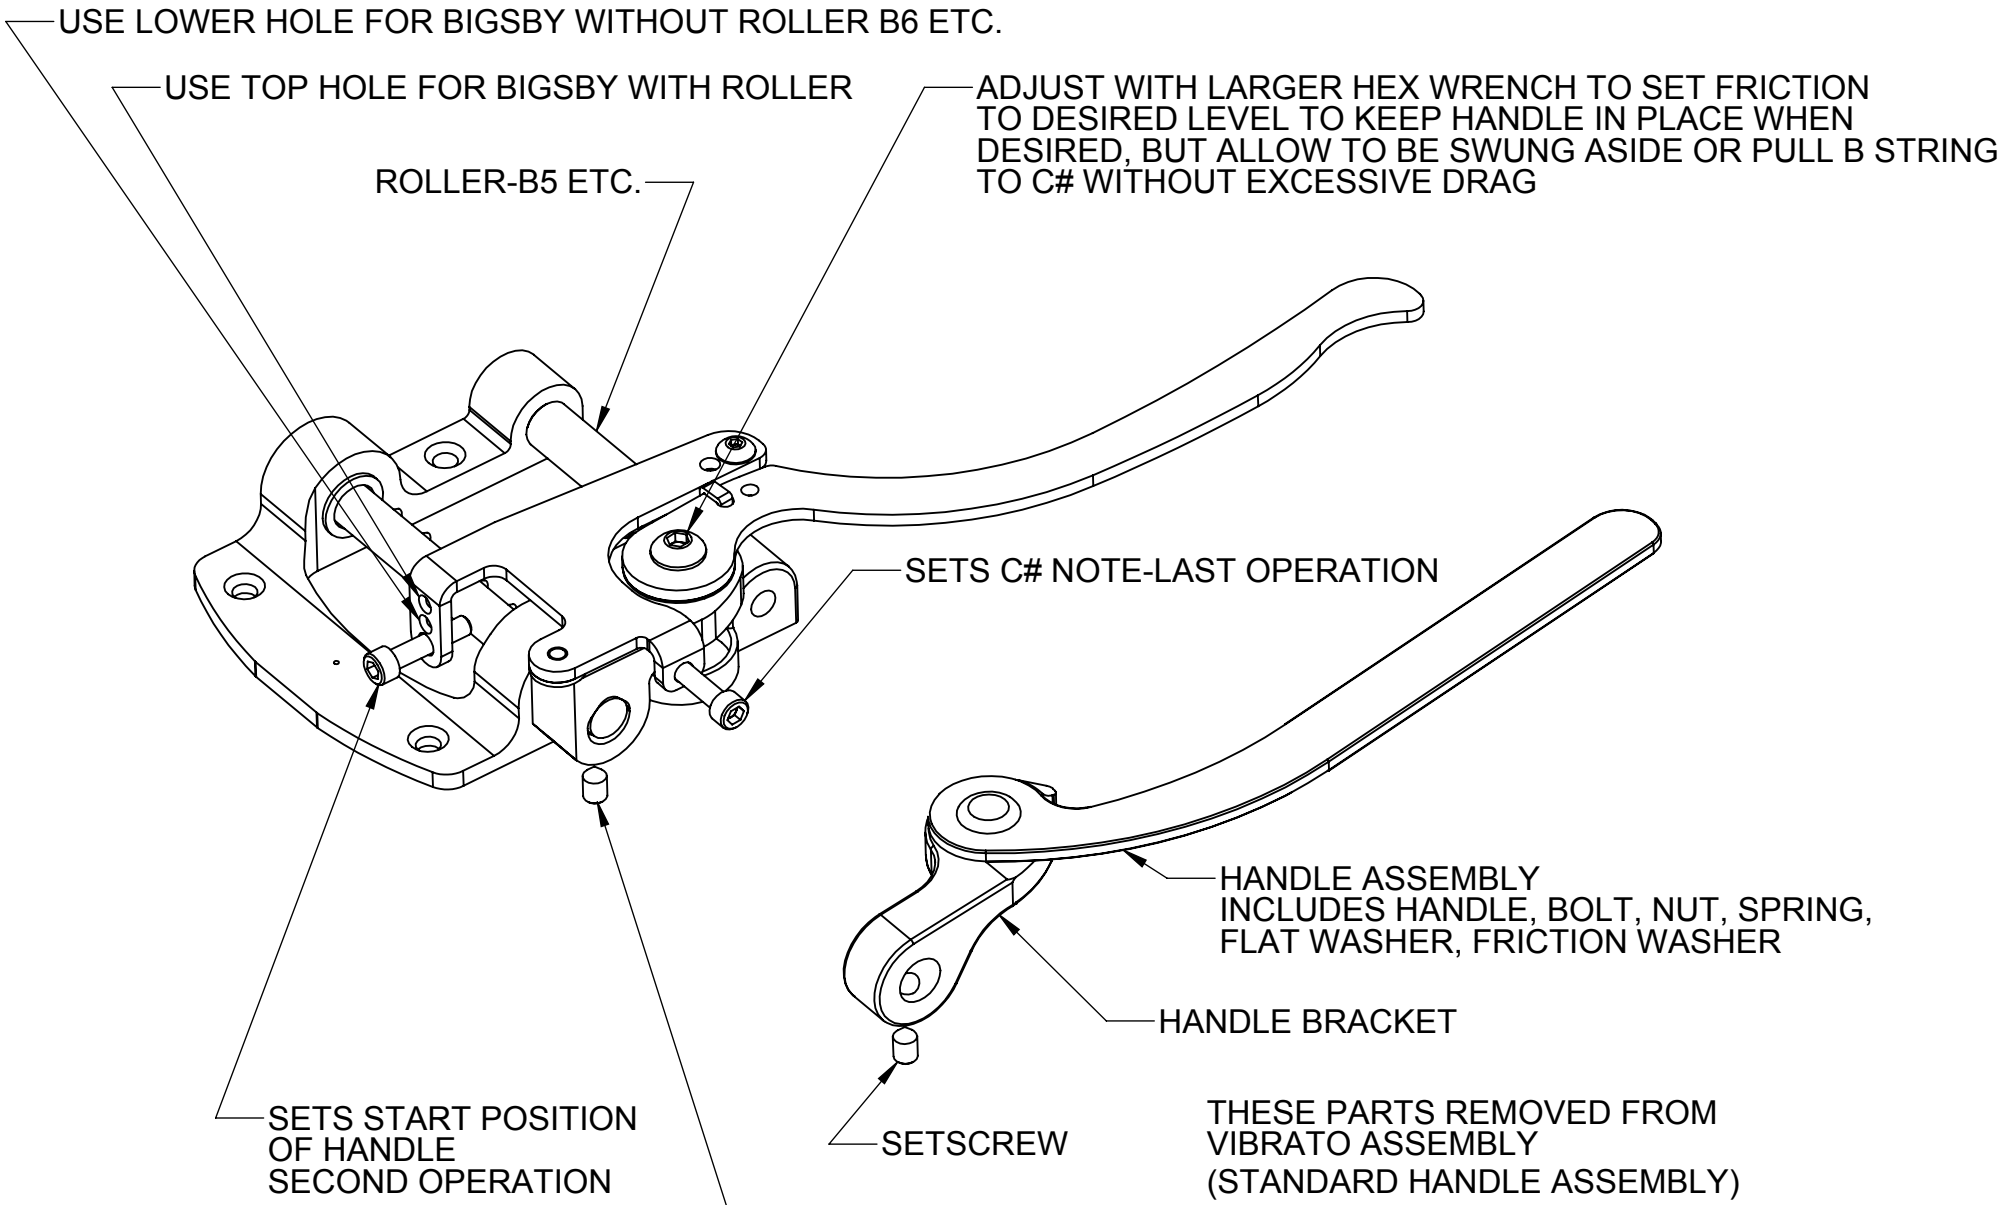

NOTE: IF THIS SCREW IS REMOVED PRIOR TO INSTALLATION, IT WILL MAKE JOB EASIER, SINCE SCREW WILL OTHERWISE HIT FRAME OF BIGSBY UNIT UNTIL STRINGS OTHER THAN THE B STRING ARE TENSIONED, SINCE THE LARGE SPRING WILL NOT BE COMPRESSED ENOUGH TO LET THE HANDLE LIE PARALLEL TO GUITAR BODY.

TIGHTEN WITH SMALLER HEX WRENCH-MAKE SURE SET SCREW IS IN RECESS ON SHAFT-TIGHTEN FIRMLY, BUT DON'T MAKE ATTEMPT TO USE FORCE GREATER THAN TIGHTNESS OF ORIGINAL HANDLE.
FIRST OPERATION IN SET-UP